



The advertisement features a row of 12 rolls of PETACKS tape at the top, each with a different colored backing (white, light green, grey, yellow, lime green, green, olive green, blue, red, black, and dark grey). Below the rolls is a large, stylized logo for PETACKS, with the 'P' being a large blue and white concentric circle. Underneath the logo, the text 'EXTREME SELF ADHERING' is written in a bold, black, italicized font, followed by 'Vinyl Repair Tape' in a smaller, black, italicized font. Below this, a paragraph of text states: 'PETACKS™ offers extreme durability, weather resistance, UV resistance, and will bond to Tarp Vinyl with maximum hold!'. At the bottom of the advertisement, a red banner contains the text: 'Installation is as easy as peel and stick!' and 'Repairs made quick and easy, with no downtime!'.

PETACKS

EXTREME SELF ADHERING
Vinyl Repair Tape

PETACKS™ offers extreme durability, weather resistance, UV resistance, and will bond to Tarp Vinyl with maximum hold!

Installation is as easy as peel and stick!
Repairs made quick and easy, with no downtime!

4" x 10' Roll - \$60.00

4" x 82' Roll - \$315.00



HOW TO GUIDE

Step: 1

Example A

Prepare area to be patched by clean cutting damaged area.

Example B

Use spray cleaner on the surface to be patched.

Example C

Clean thoroughly with paper towels/rags to remove all dirt, grease, debris to achieve maximum patch hold.

Example D

Allow to dry completely before applying patch.



Example A



Example B



Example C



Example D


Step: 2

Example E

Cut desired amount of PETACKS patch material to be used.

Example F

Round off corners of PETACKS patch material for maximum hold.

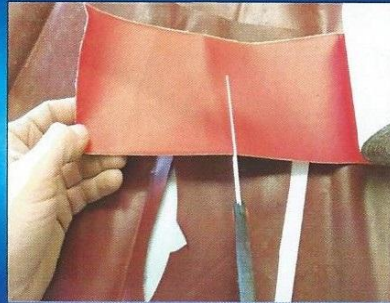

Example E



Example F

Step: 3

Example G


Peel backing away from the PETACKS patch material and apply it to the fabric evenly by hand as not to allow any air pockets or folds in the material.

Example H


Use of a fabric roller or flatten the PETACKS patch material by hand to remove any wrinkles.

(Optional)

Gentle Use of a Heat Gun or blow dryer over the PETACKS patch material can aid in increasing bond strength and flattening of material preventing edges from fraying.

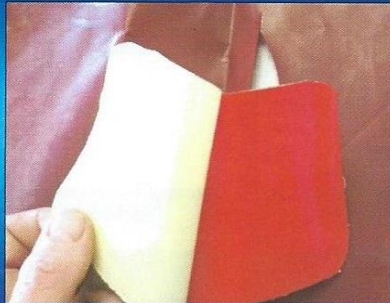

Example G

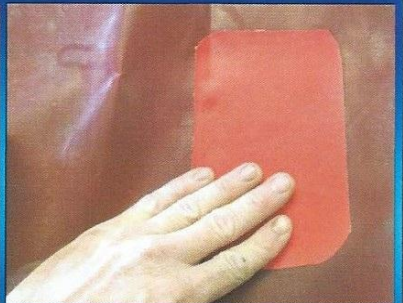

Example H

Step: 4


Example J & K

For maximum patch efficiency, if possible add a patch to the opposite side of the tarp you previously patched by restarting at Step:1. This will increase the strength of the PETACKS patch material and prevent any future tears.

When both PETACKS patch's are complete your tarp is repaired and ready to use immediately.



Example J

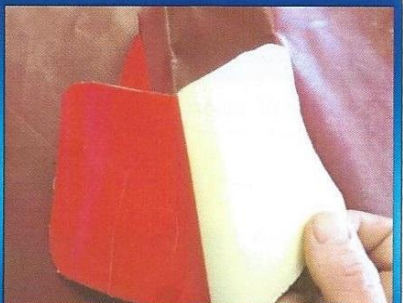

Example K



1230 40th St N
Fargo, ND 58102
800-246-1749

www.trsendustries.com
[Facebook.com/TopQualityTarps](https://www.facebook.com/TopQualityTarps)